


Flange Fittings


Flange fittings provide a means to connect inlet or drainage plumbing through the wall of the tank. Secured by metal bolts encapsulated in EPDM or VITON elastomers which provides compression for a positive seal. Order by size and material. Bolts, gasket and flange must be ordered separately. Assmann's ANSI-150 psi flange adapter, consisting of nipple and flange, converts a threaded connection to a mating flange. Length of the adapter can be made to your specifications. Siphon drain consists of welded nipple, 90° elbow and nipple to extend to 1/2-inch above tank floor.

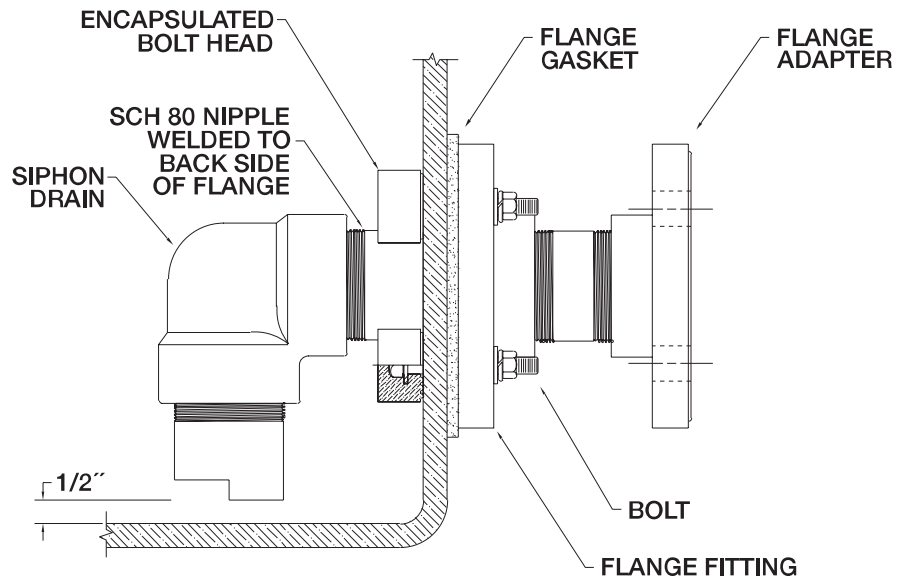

Flange Fittings Available Sizes (inches)											
Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8
Bolts	4	4	4	4	4	4	4	4	8	8	8

Bulkhead Fittings

Bulkhead fittings are economical tank to plumbing connections available in a variety of materials. Bulkhead fittings and gaskets must be ordered separately. Siphon drains are threaded to fit to bulkhead fittings. Assmann's ANSI-150 psi flange adapter, consisting of nipple and flange, converts a threaded connection to a mating flange.

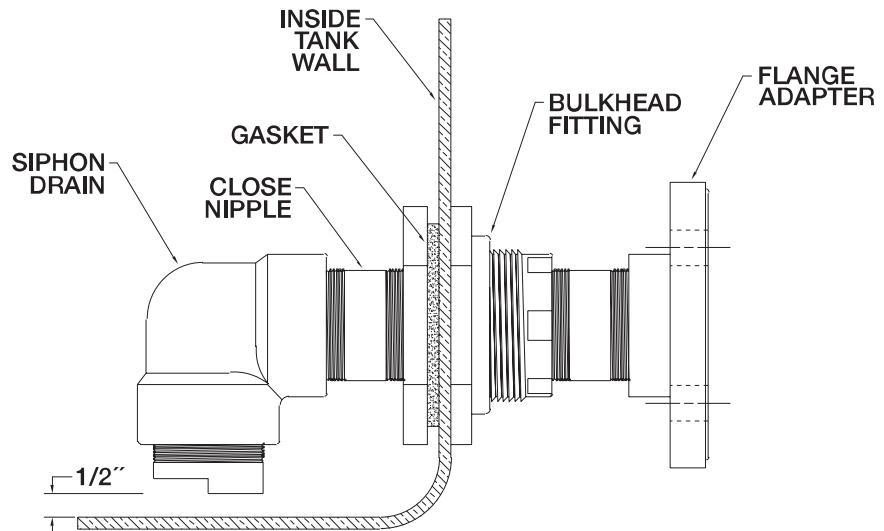

Bulkhead Fittings Available Sizes (inches)								
Size	1/2	3/4	1	1 1/4	1 1/2	2	3	4